



# Specification

## Mini Water Chiller

Model: DV1910E-P (S)



## 1-Specification:


Model Name	DV1910E-P(S)
DC Compressor Model	QX1901VDL
Refrigerant	R134a
Rated Voltage	12V
Start-up Voltage	12V
Temperature Range	-16C ~ 30C degree
Max Current	10 A
Cooling Capacity	100W~400 W
Capillary Tube	Φ2 * 0.8 m
Work Current Range	1.0 ~ 8A
Noise	40 ↓ dB(A)
Vibration	≤0.65 m/s <sup>2</sup>
N.W	6.61lbs/3 Kgs
Motor Speed	2000 ~ 6000rpm
External Size	230x200x145mm / 9.0 x7.8x5.7 inch
Driver Board	Variable Frequency Controller

## 2-Other Parameters:


Item	Standard	Overload	Note
Discharge Pressure	<1.7MPa	<2.2MPa	Compressor will be overloaded protection when temp reaches 105° degree
Suction Pressure	0.1 - 0.3Mpa	0.1 - 0.3Mpa	
Compression Ratio	<6	<8	
Discharge Temp	84° degree	105° degree	
Start-up Pressure	Only when system's high-low pressure under balance can operate compressor (Compressor has this built-in setting)		
Max Tilt Angle	40° Degree		
Oil Type & Amount	Type: POE68#                      Amount: 25cc		
Compressor Protection	Controller Automatic Protection		
Motor Data	PM Brushless DC Motor		

### 3. Refrigeration Schematic Diagram

The diagram are just for reference only. We're able to customize according to users' demand for whole system optimization.

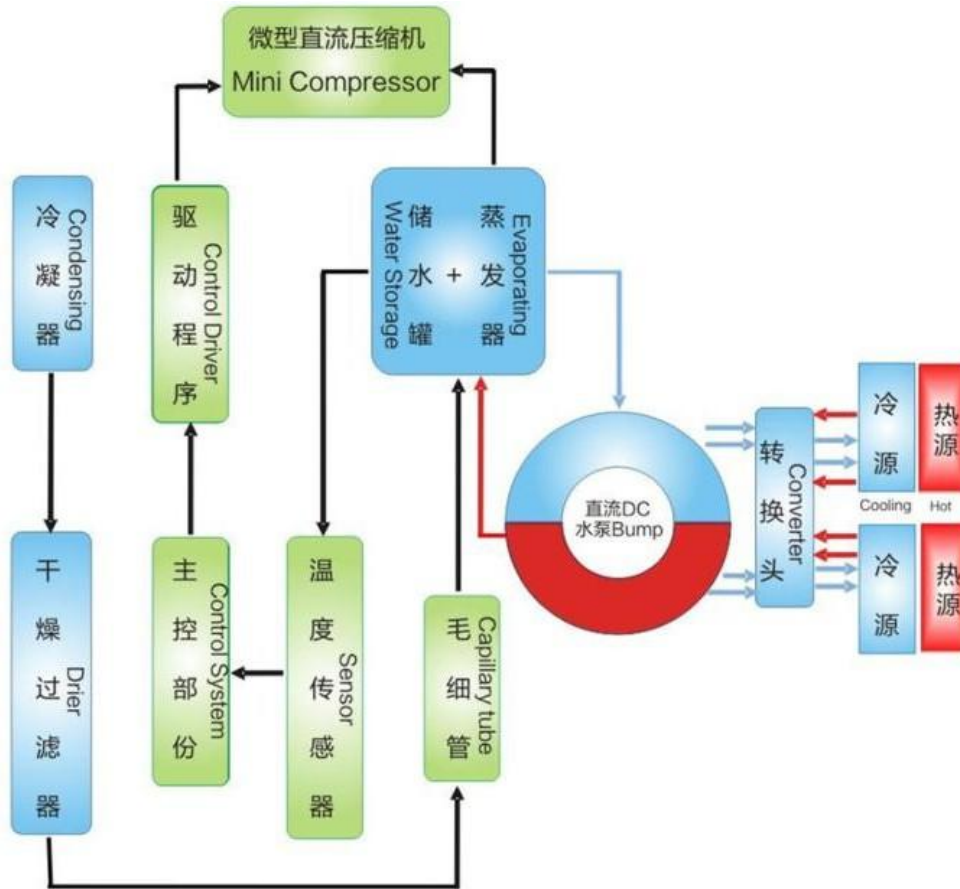

### Working Principle

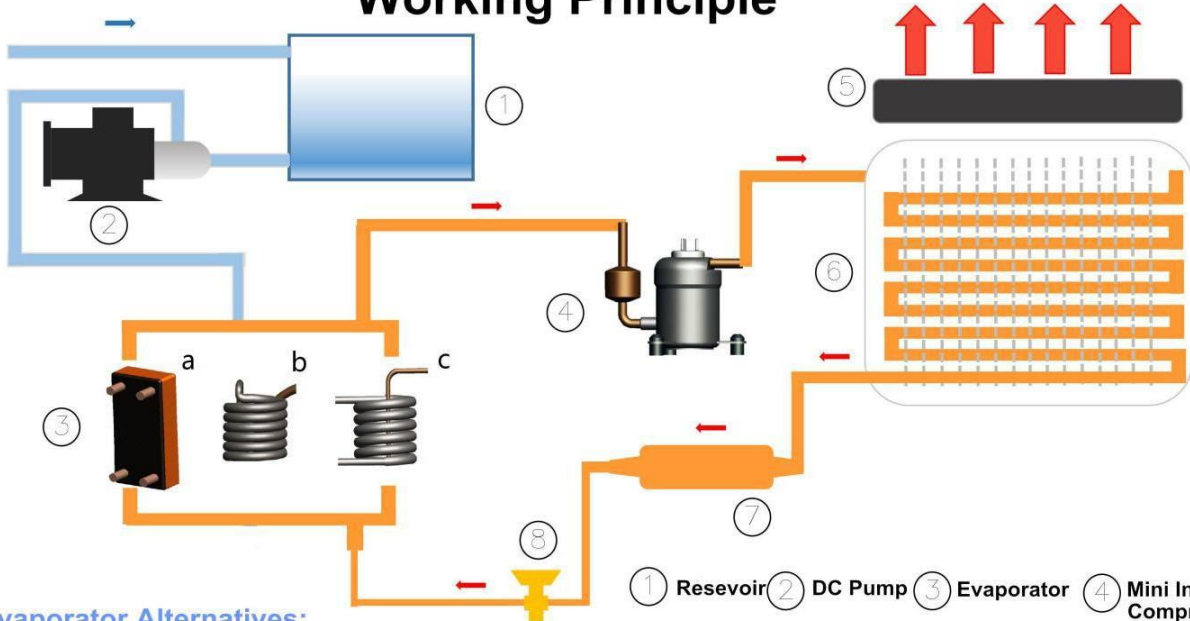

#### Evaporator Alternatives:

- a. Plate & Frame type
- b. Stainless or Copper Coil
- c. Coaxial Stainless Steel Pipe


- ① Reservoir
- ② DC Pump
- ③ Evaporator
- ④ Mini Inverter Compressor
- ⑤ DC Fan
- ⑥ Condenser Heat Exchanger
- ⑦ Capillary
- ⑧ Danfoss Valve (Alternative)

## 4. Controller Wire Connection


A Positive wire Power “ + ”

B Negative wire Power “ - ”

- ① EN Switch EN, Enable terminal, reservation for EN.
- ② PWN speed control terminal (0~5V,1K~10KHz).
- ③ Fault alarm compressor failure alarm, high level-normal, low level-failure.
- ④ Connecting lines (Any direction connecting the compressor).
- ⑤ TTL communication port.
- ⑥ 0~5V to adjust the speed.
- ⑦ Terminal for potentiometer with 50kohm to adjust speed.
- ⑧ Control program edit input socket.
- ⑨ Green LED.
- ⑩ Red LED.

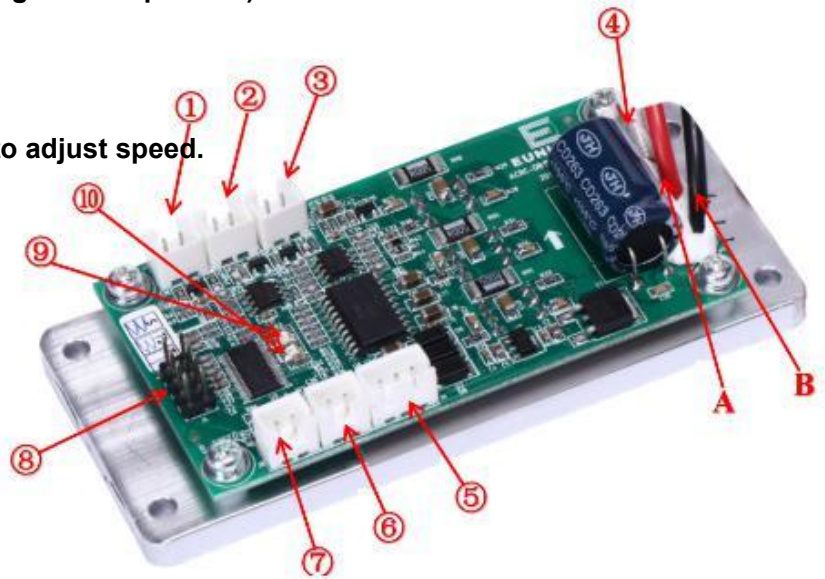

### The Driver Board Wiring Diagram

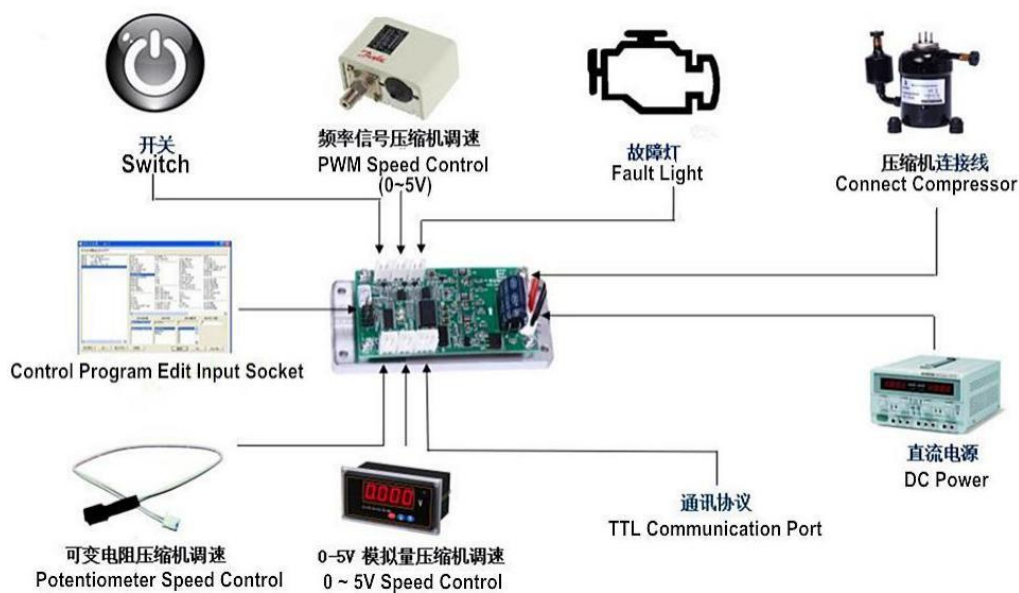

Definition of Red/Green LED indicator:		
Driver Status	Green LED	Red LED
Motor Operating Normal	Green LED and Red LED blink alternately(On-0.25s,Off-0.25s)	
Standby	Blink (On-0.25s,Off-0.25s)	Off
Motor Failure	Off	Blink N times(On-0.25s,Off-0.25s), then off 2s, repeat as above cycle (N means Error Number, seen below definition.)
N-Number of Red LED blinks	Fault Type	State
1	Over-Current	Drive board will report over-current failure when current is over 30A. It will restore in 3 mins. Compressor needs to be restarted if current is overloaded up to 7 times within 1 hour. <b>(1 RED LED blink)</b>
2	Motor Stalled	Drive board will stop the output and alarm when the motor is stalled. And driver will try to restore to run 3 minute later. <b>(2 RED LED blinks)</b>
3	Temperature Sensor Failure	The driver will not work when disconnecting of temperature sensor is detected. <b>(3 RED LED blinks)</b>
4	MOSFET Over temperature	Stop the output when the temperature of MOSFET goes up to 105℃. Restore the output when the temperature of PIM goes down to 85℃. When over-temperature protection happens, the driver stops the output and then will try to restore in 3 mins. <b>(4 RED LED blinks)</b>
5	V_BUS Low Voltage	Drive board will alarm and stop the output when V_BUS is lower than 8.2V and restore when V BUS is higher than 9V and last more than 3 minutes. <b>(5 RED LED blinks)</b>
6	V_BUS Over Voltage	Drive board will alarm and stop the output when V_BUS is higher than 17V and restore when V_BUS is lower than 16V. <b>(6 RED LED blinks)</b>
7	Lack-phase	Drive board will alarm and stop the output if disconnecting between the driver and compressor. The driver will try to restore in 3 minutes. <b>(7 RED LED blinks)</b>

## 5. Attentions:

1. Please check evaporator & condenser installation properly, when compressor is failed or poor refrigerating. Make sure the system is complete vacuum and no water inside. Refrigerant oil lacking also leads to poor refrigerating capacity.

2. Notice, Refrigerant oil will be released when we are charging refrigerant gas. Make sure the compressor has enough refrigerant oil (25g). Or compressor motor will face possible jammed or stuck due to oil lockage.

### 3. Important Functional Description:

3.1 The controller adopts analog signal control, set by communication mode. The control mode will not besaved.

3.2 Communication control mode please follows the communication protocol MODBUS RTU. (\* **Details check the attached file.**)

3.3 Under analog signal control, there are 3 types of instructions: constant pressure simulation instruction, variable resistor speed and Variable frequency speed. The highest is priority. (The default input instruction is 0).

▲ The corresponding relation between simulation instruction and speed is straight line. 0V-0.5V corresponds stop, it starts to work when instruction is more than 0.7V; 0.7V~5V corresponds 2000rpm~6000rpm.

▲ The corresponding relationship between frequency instruction and speed is straight line.

300~500Hz corresponds stop and 1000Hz starts to work; 1000~10000Hz corresponds 2000rpm~6000rpm.

▲ Variable resistance speed, 50k stops, 30k~0k corresponds to 2000 RPM to 6000 RPM.

### 3.4 Controller

This controller has two LED lights (Red and Green), following are definitions:

Controller State	Green Light	Red Light
Motor Standby	Twinkle (On-0.25s, Off-0.25s)	Off State
Motor Fault	Off State	Twinkle "N" (On-0.25s, Off-0.25s, then off 2s. (N is the Fault Signal))
Motor Normal Operation	Twinkle (On-0.25s, Off-0.25s) Red light is off when the green light is on.	Twinkle (Off-0.25s, On-0.25s) Red light is on when the green light is off.

### 3.5 Trouble Shooting Manual

Signal	Fault Type	State
1	Over-Current	Controller will report over-current fault when current reaches 30A. It recovers after 3mins. Compressor need to be restarted if current is overloaded for 7 times within 1 hour.
2	Motor Block up	Controller will stop if motor block up, it will recover after 3mins. However, it takes 10mins to recover if motor block up 3 times continuously.
3	Temperature sensor failed	Controller won't work if temperature sensor fails to connection.
4	Inverter temperature overload	Power Module, Max temperature is 105°C, it will recover when temperature is 85°C, controller re-work after 3mins pause if temperature overloads several times.
5	Bus under-voltage	Bus will report default when voltage is less than 8.2V, controller stops.
6	Bus over-voltage	Bus will report default when voltage is over 17V and recover when voltage below 16V. Controller stop under voltage overloaded.
7	Output default phase	Compressor can't work if fails to connect the controller. Output default phase, will recover in 3mins.

## 6. Troubleshooting

Symptom	Possible Cause	Remedy
Compressor will not run when input voltage is applied	1. On/Off switch wires are not twisted together	Keep On/Off switch wires twisted.
	2. Loose wire or connection	Verify all connections between compressor and drive are in place and in the proper order.
	3. Power supply too small, input voltage is not enough to start the compressor	Measure input voltage to drive board and stabilize the compressor input voltage at the rated voltage.
	4. Compressor is in lock rotor condition	Check drive board for flashing red light. (2 RED LED blinks).
Compressor turns off intermittently	1. Compressor overheating.	Check drive for flashing red light. When over-temperature protection happens, the drive stops the output and then will try to restore in 3 mins. (4 RED LED blinks).
	2. Drive board overheating.	Check drive for flashing red light. The driver will not work when disconnecting of temperature sensor is detected. (3 RED LED blinks).
	3. Loose wire or connection.	Verify all wiring connections.
	4. Inadequate power supply.	Verify compressor is not drawing more power than power supply can deliver.
Compressor Overheating	1. Ambient temperature too high	Increase airflow over compressor.
	2. Inadequate airflow over compressor	

## 7. Outer Dimension:

(230x200x145mm / 9.0 x7.87x5.7 inch)

